

Orona 3G 2026


Machine-room above electrical gearless solutions

With the latest direct drive technology in public buildings. Less noise and more accessible maintenance. The robust solution with machine room and the latest technology for heavy traffic.

General specifications

Load	630 to 1,600 kg
Capacity	8 to 21 persons
Speed	1 - 1.6 m/s
Maximum travel	50 - 75 m
Maximum floors served	32 floors
Entrances	1 front / 2 open through
Drive system	Direct gearless
Controller	ARCA II controller, low energy consumption multiprocessor
Door types	Automatic side-opening / Automatic central-opening
Clear door opening	From 800 to 1,600 mm (in 100 mm increments)
Door height	2,000 / 2,100 / 2,200 / 2,300 mm
Car dimensions	Parametric car dimensions
Internal car height	2,100 / 2,200 / 2,300 / 2,400 mm
Aesthetic solutions	PR1 / PR2 / PR3 / PR4 / PR5 PS1 / PS2 / PS3 / PS4 / PS5 / PS6 / PS7 / PS8 / PS9 / Orona 3G Public Plus

Standard Optional

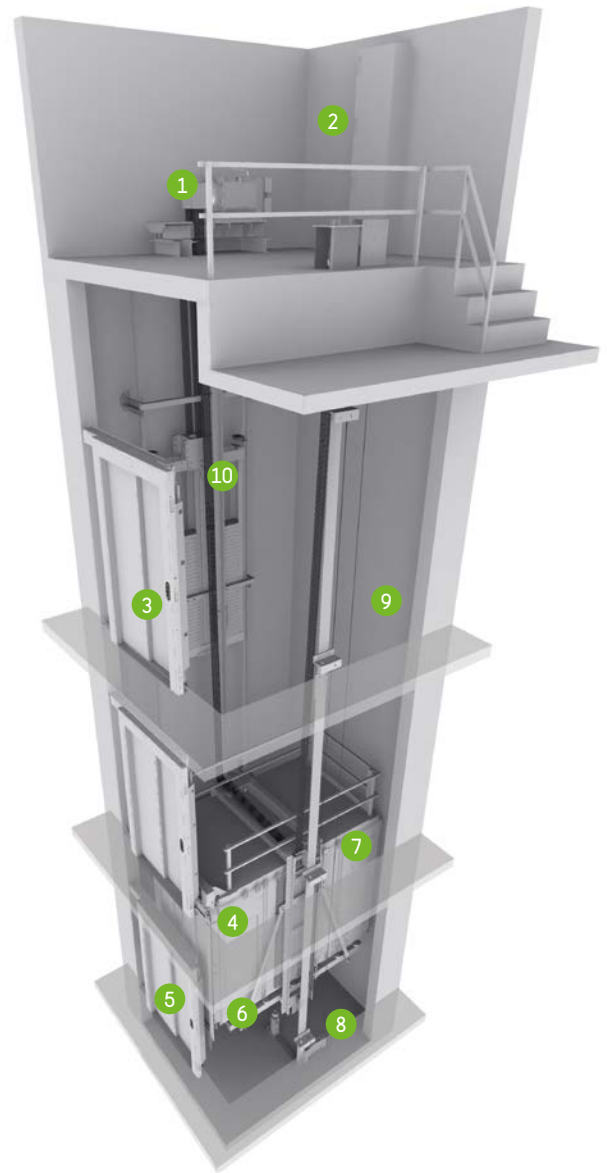

- | | | | | |
|---|---|--|--|--|
| <p>1 DRIVE</p> <p>Compact, quiet, gearless, energy efficient, speed regulated (VVVF) permanent magnet electric motor.</p> <p></p> | <p>2 MACHINE-ROOM</p> <p>A traditional solution simplifying lift maintenance.</p> <p></p> | <p>3 SOLID DOORS</p> <p>Extra robust doors with reduced sound levels inside and outside the lift and which are specially constructed for high volume passenger traffic.</p> <p></p> | <p>4 TWO-WAY COMMUNICATIONS</p> <p>Between the lift and the emergency 24-hour Service Call Centre according to EN 81-28.</p> <p></p> | <p>5 AUTOMATIC RESCUE SYSTEM</p> <p>With floor level indication to ensure fast, efficient and safe evacuation of passengers in the event of an emergency. As an option the system can incorporate a fully automatic rescue device to evacuate passengers in the event of a power failure.</p> <p></p> |
| <p>6 CARS</p> <p>Reinforced wall panels and flooring provides durability for heavy duty usage. Flexible configurations offering optimum car and door dimensions.</p> <p></p> | <p>7 ROBUST LIFT CAR</p> <p>Provides greater comfort during lift travel, with reduced vibration and noise.</p> <p></p> | <p>8 ACCESSIBLE SPACE BELOW THE PIT</p> <p>Adapts the lift to suit buildings which have an accessible space below the pit (optional).</p> <p></p> | <p>9 PARAMETRIC/FLEXIBLE</p> <p>Flexible car and door configurations ensure available shaft dimensions can be optimised (optional).</p> <p></p> | <p>10 TRACTION ROPES</p> <p>Orona small diameter ropes replace traditional steel ropes. As a result of their lighter weight, longer lifespan and greater flexibility, it is possible to use a more compact, efficient and eco-friendly gearless machine.</p> <p></p> |

